



20T 2.4 × 7

超小型保险丝管 (延时型) MICROFUSE (SLOW-BLOW)

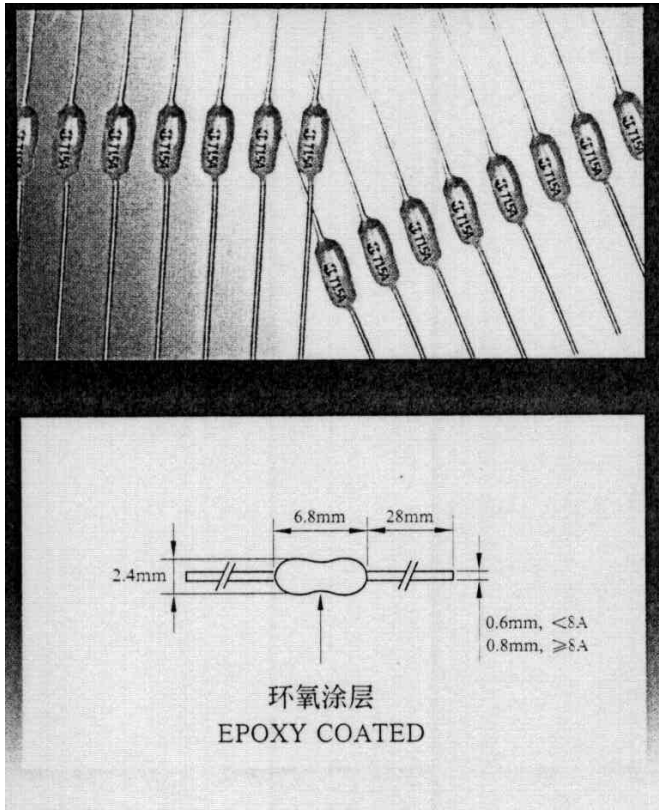

I-T CHARACTERISTICS CURVE

电流-时间曲线图

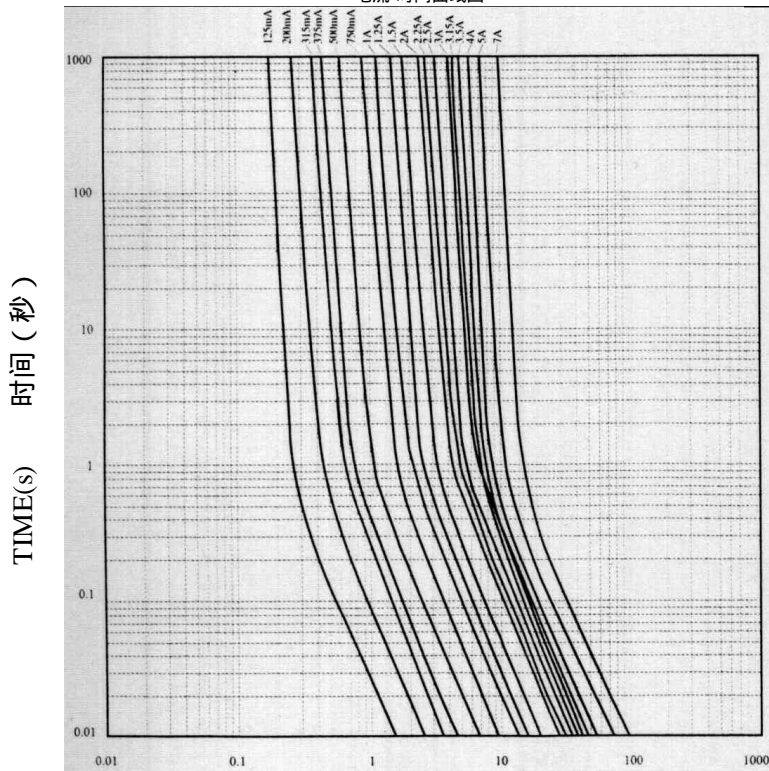

CURRENT(A)
电流 (安培)

目录编号 CATALOG NO.	额定电流 AMPERE RATING	认证 APPROVALS								I ² T 参考值 REFERENCE (A ² .S)
		UL		UR		CSA		PSE		
		H	L	H	L	H	L	H	L	
0100H/L	100mA			O	O	O	O			0.01548
0125H/L	125mA			O	O	O	O			0.02380
0150H/L	150mA			O	O	O	O			0.03530
0160H/L	160mA			O	O	O	O			0.04073
0200H/L	200mA			O	O	O	O			0.06272
0250H/L	250mA			O	O	O	O			0.098
0300H/L	300mA			O	O	O	O			0.128
0315H/L	315mA			O	O	O	O			0.151
0350H/L	350mA			O	O	O	O			0.194
0375H/L	375mA			O	O	O	O			0.211
0400H/L	400mA			O	O	O	O			0.341
0500H/L	500mA			O	O	O	O			0.467
0600H/L	600mA			O	O	O	O			0.641
0630H/L	630mA			O	O	O	O			0.783
0750H/L	750mA			O	O	O	O			0.933
0800H/L	800mA			O	O	O	O			1.35
010H/L	1A			O	O	O	O	O		1.85
012H/L	1.2A			O	O	O	O	O		2.30
013H/L	1.25A			O	O	O	O	O		2.68
015H/L	1.5A			O	O	O	O	O		4.23
016H/L	1.6A			O	O	O	O	O		5.34
020H/L	2A			O	O	O	O	O		8.24
025H/L	2.5A			O	O	O	O	O		12.86
030H/L	3A			O	O	O	O	O		18.41
032H/L	3.15A			O	O	O	O	O		15.53
035H/L	3.5A			O	O	O	O	O		22.24
040H/L	4A			O	O	O	O	O		30.42
050H/L	5A			O	O	O	O	O		56.38
060H/L	6A			O	O	O	O	O		83.42
063H/L	6.3A			O	O	O	O	O		90.79
070H/L	7A			O	O	O	O	O		105.46

H DENOTES FOR 250V (H 表示 250V)
L DENOTES FOR 125V (L 表示 125V)
O DENOTES FOR APPROVED (O 表示已经取得认证)
“CCC” ARE PENDING (“CCC” 申请中)

分断电流 :

INTERRUPTING RATING:
30 amperes at 125V AC(100mA-7A)
30 amperes at 250V AC(100mA-7A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定电流 RATING	熔断时间 BLOWING TIME
100%	4 hours Min (最快 4 小时)
200%	1-60sec (1-60 秒)
300%	0.2-3sec (0.2-3 秒)
800%	0.02-.01sec (0.02-0.1 秒)