


61S,62S 6.35 × 32


玻璃保险丝管 (延时型) GLASS TUBE FUSE (SLOW-BLOW)

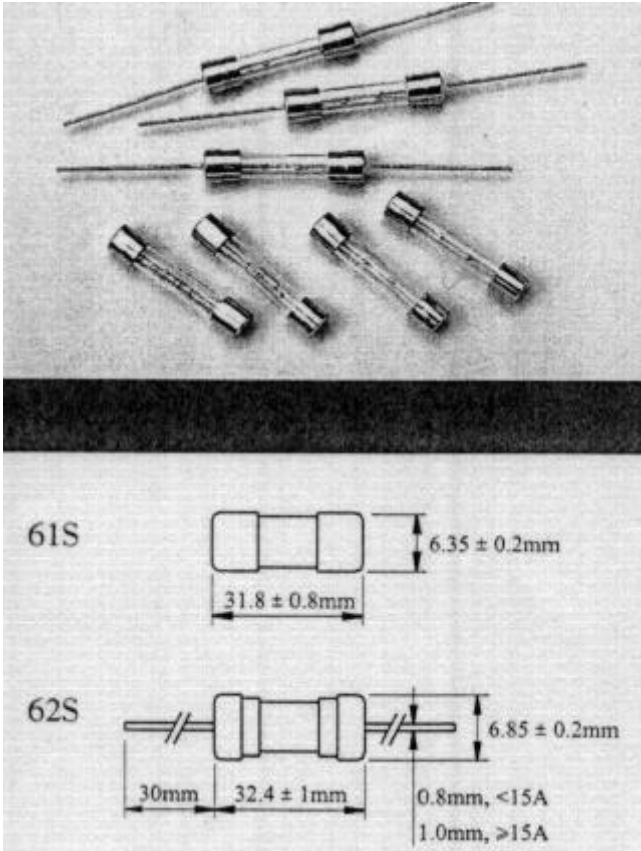

I-T CHARACTERISTICS CURVE

电流-时间曲线图

TIME(s)
时间 (秒)

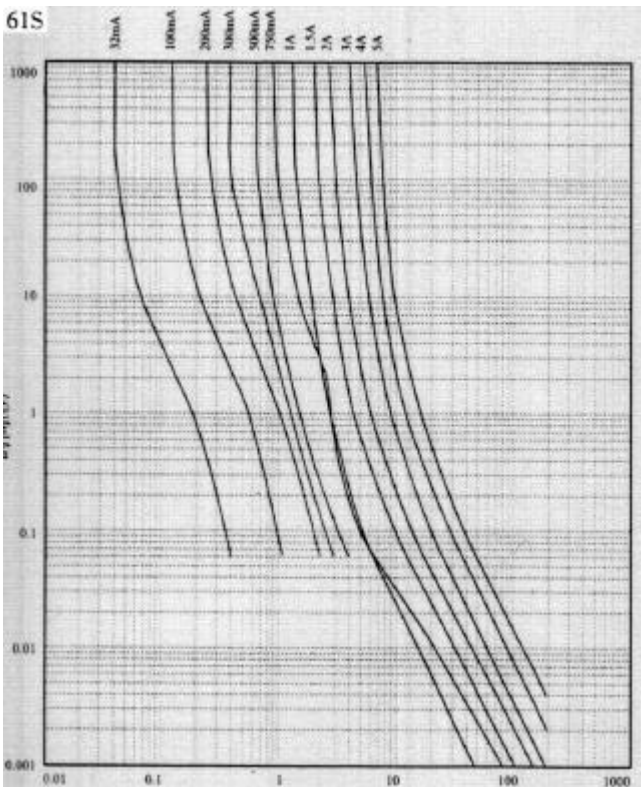

CURRENT(A)
电流 (安培)

目录编号 CATALOG NO.	额定电流 AMPERE RATING	认证 APPROVALS								I ² T 参考值 REFERENCE (A ² .S)
		UL		UR		CSA		PSE		
		H	L	H	L	H	L	H	L	
0032H/L	32mA	O	O			O	O			0.0037
0050H/L	50mA	O	O			O	O			0.0090
0063H/L	63mA	O	O			O	O			0.0013
0080H/L	80mA	O	O			O	O			0.021
0100H/L	100mA	O	O			O	O			0.033
0125H/L	125mA	O	O			O	O			0.052
0150H/L	150mA	O	O			O	O			0.075
0160H/L	160mA	O	O			O	O			0.082
0200H/L	200mA	O	O			O	O			0.13
0250H/L	250mA	O	O			O	O			0.17
0300H/L	300mA	O	O			O	O			0.24
0315H/L	315mA	O	O			O	O			0.26
0350H/L	350mA	O	O			O	O			0.32
0400H/L	400mA	O	O			O	O			0.41
0500H/L	500mA	O	O			O	O			0.64
0600H/L	600mA	O	O			O	O			0.92
0630H/L	630mA	O	O			O	O			1.0
0750H/L	750mA	O	O			O	O			1.3
0800H/L	800mA	O	O			O	O			1.6
010H/L	1A	O	O			O	O	O	O	2.3
012H/L	1.2A	O	O			O	O	O	O	6.0
013H/L	1.25A	O	O			O	O	O	O	6.6
015H/L	1.5A	O	O			O	O	O	O	9.5
016H/L	1.6A	O	O			O	O	O	O	14
020H/L	2A	O	O			O	O	O	O	27
025H/L	2.5A	O	O			O	O	O	O	52
030H/L	3A	O	O			O	O	O	O	66
032H/L	3.15A	O	O			O	O	O	O	77
035H/L	3.5A	O	O			O	O	O	O	99
040H/L	4A	O	O			O	O	O	O	140
050H/L	5A	O	O			O	O	O	O	157
060H/L	6A							O	O	182
063H/L	6.3A							O	O	210
070H/L	7A							O	O	302
080H/L	8A							O	O	416
090H/L	9A							O	O	528
100H/L	10A							O	O	646
120H/L	12A							O	O	960
150H/L	15A							O	O	1551

H DENOTES FOR 250V (H 表示 250V)

L DENOTES FOR 125V (L 表示 125V)

O DENOTES FOR APPROVED (O 表示已经取得认证)

分断电流 :

INTERRUPTING RATING:

10,000 amperes at 125V AC(32mA-5A)

35 amperes at 250V AC(32mA-1A)

100 amperes at 250V AC(1.2A-3.5A)

200 amperes at 250V AC(4A-5A)

500 amperes at 125V AC(1A-15A) MITI TYPE A

100 amperes at 250V AC(1A-15A) MITI TYPE A

电气特性 ELECTRICAL CHARACTERISTICS:

额定电流 RATING	熔断时间 BLOWING TIME
100%	4 hours Min (最快 4 小时)
135%	1 hours Max (最慢 1 小时)
200%	120 sec Max (最慢 120 秒)