



65TS 6.35 × 32

瓷保险丝管 (延时型) CERAMIC TUBE FUSE (SLOW-BLOW)

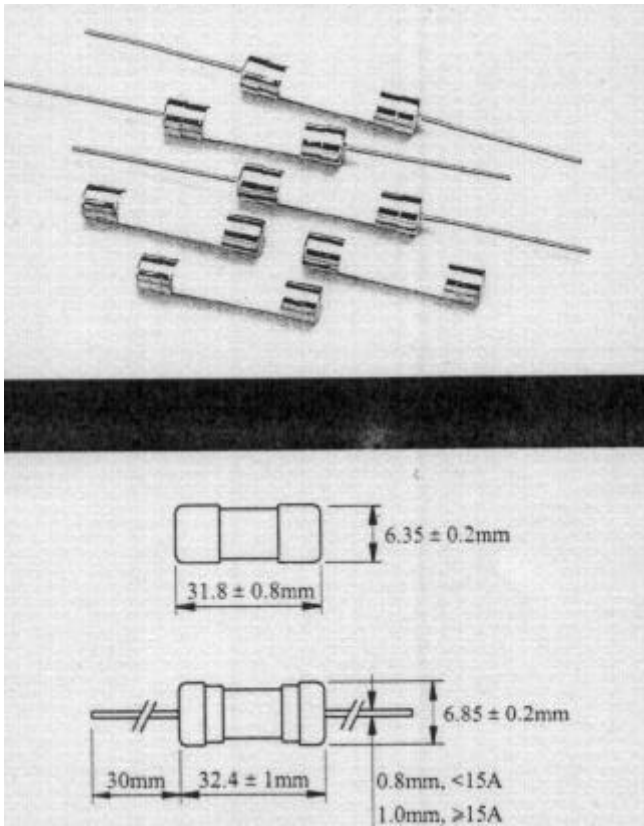

I-T CHARACTERISTICS CURVE
电流-时间曲线图

TIME(s)
时间(秒)

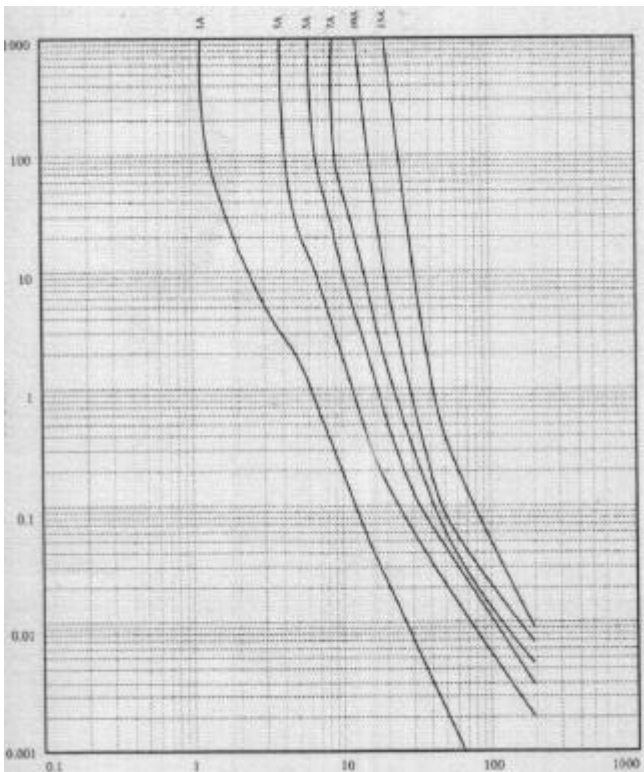

CURRENT(A)
电流(安培)

| 目录编号 CATALOG NO. | 额定电流 AMPERE RATING | 认证 APPROVALS | | | | | | | | I ² T 参考值 REFERENCE (A ² .S) |
|------------------------|--------------------------|--------------|---|----|---|-----|---|-----|---|--|
| | | ULCUL | | UR | | CSA | | PSE | | |
| | | H | L | H | L | H | L | H | L | |
| 0500H/L | 500mA | O | O | | | | | | | |
| 0600H/L | 600mA | O | O | | | | | | | |
| 0630H/L | 630mA | O | O | | | | | | | |
| 0750H/L | 750mA | O | O | | | | | | | |
| 0800H/L | 800mA | O | O | | | | | | | |
| 010H/L | 1A | O | O | | | | | O | O | 4.1 |
| 012H/L | 1.2A | O | O | | | | | O | O | 5.9 |
| 013H/L | 1.25A | O | O | | | | | O | O | 6.4 |
| 015H/L | 1.5A | O | O | | | | | O | O | 9.2 |
| 016H/L | 1.6A | O | O | | | | | O | O | 10 |
| 020H/L | 2A | O | O | | | | | O | O | 16 |
| 025H/L | 2.5A | O | O | | | | | O | O | 20 |
| 030H/L | 3A | O | O | | | | | O | O | 24 |
| 032H/L | 3.15A | O | O | | | | | O | O | 26 |
| 035H/L | 3.5A | O | O | | | | | O | O | 32 |
| 040H/L | 4A | O | O | | | | | O | O | 42 |
| 050H/L | 5A | O | O | | | | | O | O | 66 |
| 060H/L | 6A | O | O | | | | | O | O | 94 |
| 070H/L | 7A | O | O | | | | | O | O | 128 |
| 080H/L | 8A | O | O | | | | | O | O | 168 |
| 100H/L | 10A | O | O | | | | | O | O | 262 |
| 120H/L | 12A | O | O | | | | | O | O | 377 |
| 130H/L | 13A | O | O | | | | | O | O | 443 |
| 150H/L | 15A | O | O | | | | | O | O | 590 |
| 200H/L | 20A | | | O | O | | | | | 1058 |
| 250H/L | 25A | | | O | O | | | | | 1674 |
| 300H/L | 30A | | | O | O | | | | | 2362 |

H DENOTES FOR 250V (H 表示 250V)
L DENOTES FOR 125V (L 表示 125V)
O DENOTES FOR APPROVED (O 表示已经取得认证)

分断电流 :

INTERRUPTING RATING:
10,000 amperes at 125V AC(500mA-15A)
35 amperes at 250V AC(500mA-1A)
100 amperes at 250V AC(1.2A-3.5A)
200 amperes at 250V AC(4A-10A)
750 amperes at 250V AC(12A-15A)
1500 amperes at 250V AC(20A-30A)
500 amperes at 125V AC(1A-15A) MITI TYPE A
100 amperes at 250V AC(1A-15A) MITI TYPE A

电气特性 ELECTRICAL CHARACTERISTICS:

| 额定电流 RATING | 熔断时间 BLOWING TIME |
|-------------|------------------------|
| 100% | 4 hours Min (最快 4 小时) |
| 135% | 1 hours Max (最慢 1 小时) |
| 200% | 120 sec Max (最慢 120 秒) |